


SONORA[®] CEILING TILES

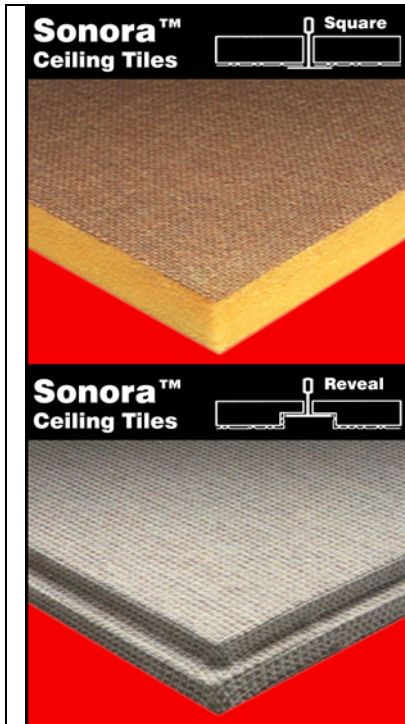

Sonora[®] Ceiling tiles are an elegant choice for a variety of ceiling grid applications requiring high absorption.

Construction:

One piece of 6-7 PCF noncombustible and dimensionally stable glass fiber core.

Thickness: 1", 2"

Size: 2' x 2' (nominal), 2' x 4' (nominal)
Specify tile size when ordering.

Finish: Fabric - Guilford of Maine[®] FR701[®] Style 2100 or factory approved finish

Fire Rating: Class A

Sound Absorption Coefficient								
Thickness	Mounting	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	Type A	0.67	0.85	0.79	1.02	1.08	1.05	0.95
1"	Type E400	0.58	0.91	0.78	1.01	1.05	1.13	0.95

SONORA[®] BLACK SCRIM CEILING TILES

Construction:

6-7 PCF Ecose[®] glass fiber core with high NRC rating.

Thickness: 1", 2"

Size: 2' x 2' (nominal)

Finish: Black Scrim

Fire Rating: Class A



Sound Absorption Coefficients (Type E-400 Mounting)							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.78	1.07	.87	1.04	1.12	1.15	1.05

Flip to page 5 or go to www.Acousticsfirst.com for more varieties of Sonora[®] Ceiling Tile products.