

Grid Mount Guide

Aeolian - Grid Installation



INSTALLATION OVERVIEW

Insert, rotate, and seat.

A clear, repeatable sequence for lay-in ceiling grid installations.

Before installation


- Support the diffuser with two hands.
- Do not bend the perimeter flange.
- Maintain at least 16 in (406 mm) clear space above the grid.

1 Prepare the opening




Confirm a clear opening above the grid.

2 Lift at an angle

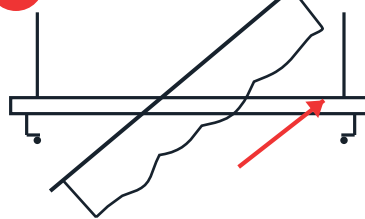


Tilt the diffuser and lift it through the opening.

3 Rotate above grid

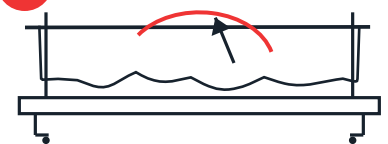


Rotate above the grid while supporting edges.

4 Lower into position

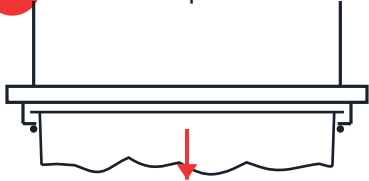

Lower the perimeter flange evenly onto the tees.

5 Check final seating

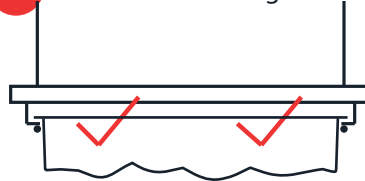

Verify the unit is centered and fully seated.

Finished installation



Perimeter flange rests continuously on the grid.