

PAINT GUIDE: DIFFUSERS

(THERMOFORMED PLASTIC)



How to paint Acoustics First® Diffusers

Acoustics First® uses a Class A thermoformed plastic for many of their diffuser products. These include:

The ArtDiffusor®

- Model C
- Model D
- Model F
- Quadratic Model Q

Double Duty Diffuser®

Pyramidal and QuadraPyramid™ Diffuser

The Aeolian®

Step one:

Clean and dry the surface.

- Use standard dish detergent and water.
- Many times only a damp cloth is required.
- Remove dust and debris.
- Allow diffuser to dry completely.

Step Two:

Prime the surface.

- Use a plastic safe/plastic bonding primer.
- Spray application of primer is recommended.
- Apply in thin coats to avoid drips.
- Be sure to cover completely.
- Allow time to dry completely.

(Note: if using a plastic safe paint with primer included, this step can be skipped.)


Step Three:

Paint the surface.

- Spray application of paint is recommended.
- Apply in thin coats to avoid drips.
- Be sure to cover completely.
- Let it dry completely before installation.



ArtDiffusor® Model D – Factory Finish

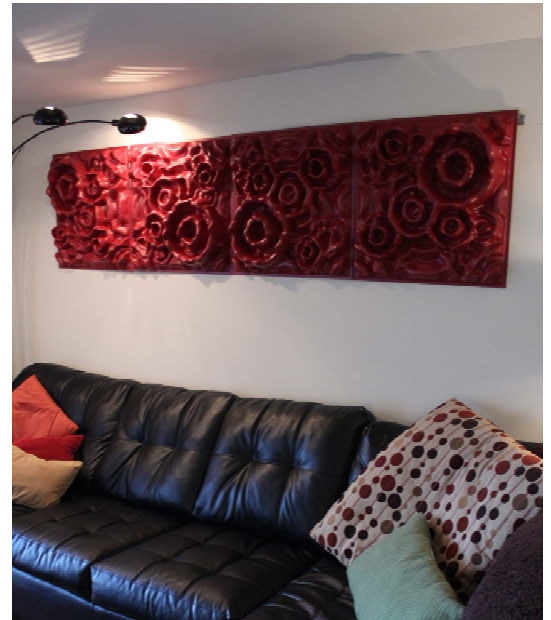

ArtDiffusor® Model D Diffusers - Painted Red